


QUALITY FILTERS, INC.

THINKSIMPLE. THINKSMART. THINKQUALITY.

23351 Grissom Drive
 Robertsdale, AL 36567
 www.QualityFilters.com

Phone: (251) 947-2400
 Order Fax: (251) 947-2499
 Sales Fax: (251) 947-7948

QUALITY SEAL - QSM 100 Multi-Pocket Polyester Cube Filters		
Date 26 Jan 11	Dwg No. Q-110009	Rev E
Date 26 Jan 11		

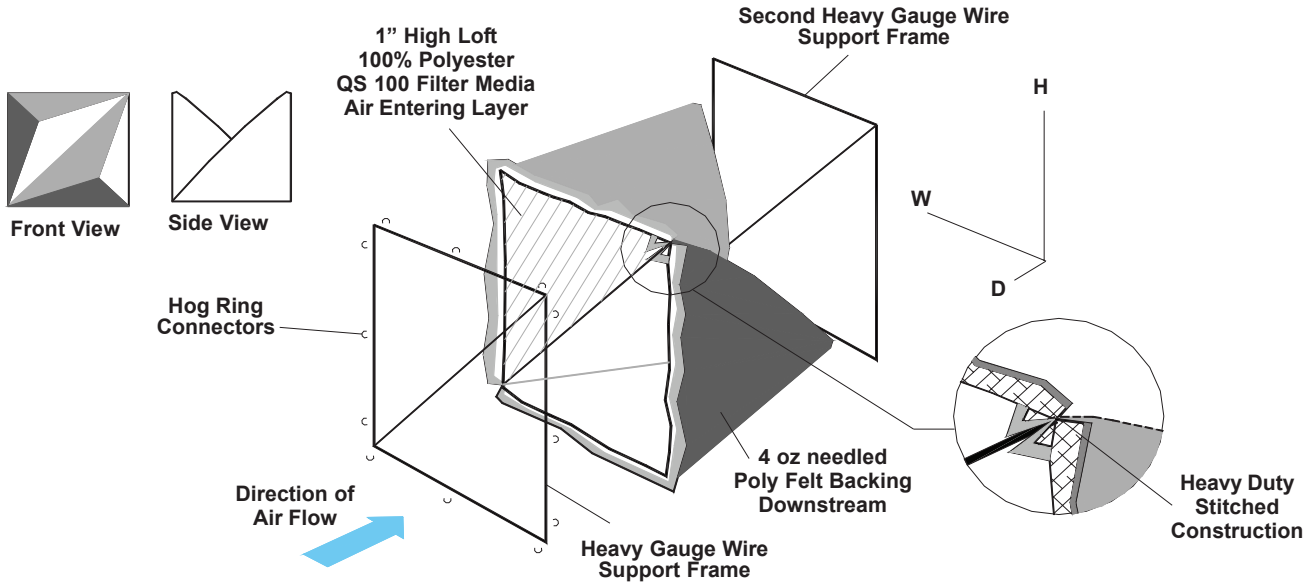

2 Pocket Triangle Configuration

Notes:

Quality Seal Multi-Pocket Polyester Cube Filters offer up to five times the filter area of flat panels.

One and two pocket configurations in any media or combination of medias are available.

Quality Seal Multi-Pocket Polyester Cube Filters are the best way to maximize the service life and efficiency of the "Quality Seal" polyester medias.

Double wire frame construction encapsulates the media, providing a self sealing support that also withstands warping from heavy loading and aggressive installation.

Polyester overlap around the edges inhibits dust and paint bypass.

Ideal for HVAC or Paint Overspray collection.

Part Number Guide

Product Code	Pocket Count*	Media	Dimensions	Header	No Support Wire
CF	1	QS	WxHxD	H	X
Examples:					
CF1QS122412 = Cube Filter, 1 Pkt, QS 100 Media, 12x24x12					
CF2QS202015H = Cube Filter, 2 Pkt, QS 100 Media, 20x20x15, with Header					
*Q denotes 2 triangle shaped pockets					

Typical Performance Data (24x24x15 - 2 Pocket Filter)

Product Code	ASHRAE 52.2 - 1999				Initial Resistance "w.g."	Final Resistance "w.g."
	MERV Value	E1 %	E2 %	E3 %	@ 300 fpm	@ 300 fpm
CF2QS	8*	n/a	n/a	n/a	0.07	1.00

*Minimum performance expectation - Test data pending.

Media Area (sq. ft.) QS 100 Media

Face Dimensions w x h	1 Pkt Square Cubes			2 Pkt Tapered Cubes		
	Depth	12"	15"	20"	12"	15"
12x24	8.00	9.50	12.00	-	-	-
16x20	8.22	9.72	12.22	8.67	10.83	14.44
16x25	9.61	11.32	14.17	10.33	12.92	17.22
20x20	9.44	11.11	13.89	9.17	11.46	15.28
20x24	10.67	12.50	15.56	10.50	13.13	17.50
20x25	10.97	12.85	15.97	10.83	13.54	18.06
24x24	12.00	14.00	17.33	11.00	13.75	18.33
2 Pkt Triangular Cubes						
	Depth	13"	14"	16"	18"	
12x24	6.71	-	-	-	-	
20x20		7.86	-	-	-	
20x25			10.0	-	-	
24x24				11.31	-	

Characteristics	Quality Seal - QSM 100
Filter Media, Air Entry Layer	1 inch thick; 15/40 denier dry polyester blend with calendered smooth downstream layer
Filter Media, Air Exit Layer	4 oz/yd ² polyester felt
Construction Technique	Sewn pockets with hog ring fasteners
Support Frames	Two 0.148 inch (9 gauge) galvanized steel wire frames
Max. Temperature	100°F (38°C) continuous service, Peaks to 120°F (49°C)
Max. Humidity	Resistant to 100% R.H.