


# QUALITY FILTERS, INC.

THINKSIMPLE. THINKSMART. THINKQUALITY.

23351 Grissom Drive  
 Robertsdale, AL 36567  
 www.QualityFilters.com

Phone: (251) 947-2400  
 Order Fax: (251) 947-2499  
 Sales Fax: (251) 947-7948

QUALITY PAK Synthetic Multi-Pocket Bag Filters		
Date 15 Jan 11	Dwg No. <b>Q-110002</b>	Rev <b>E</b>
Date 15 Jan 11		

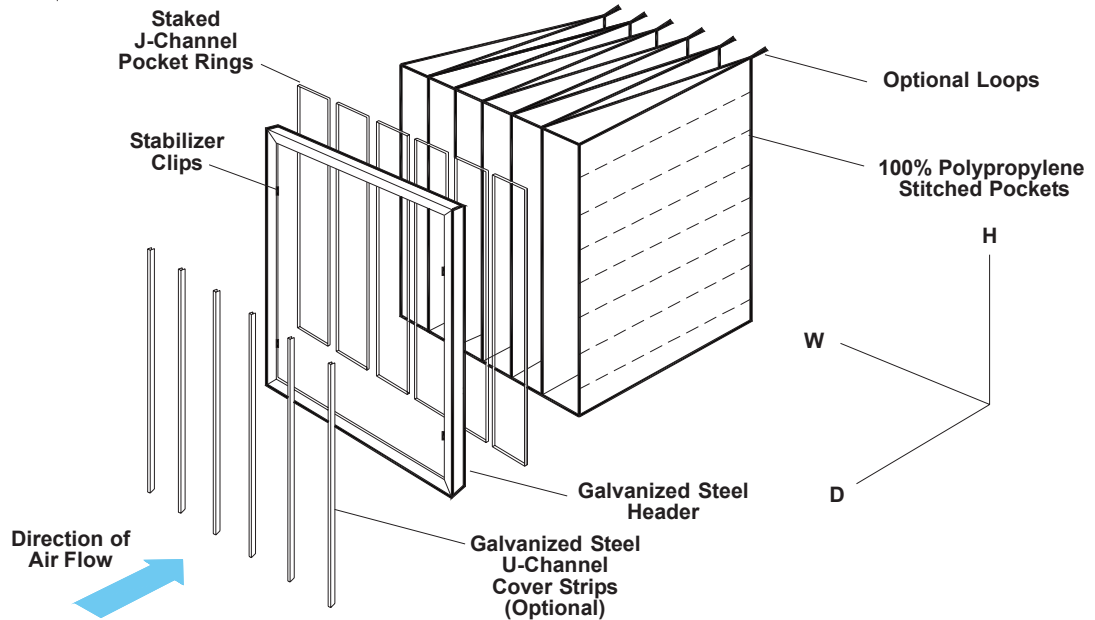

**Notes:**

Quality Pak filters are available in four standard face dimensions and six standard pocket lengths up to 36" allowing maximum flexibility per system. The Quality Paks are available in non-standard sizes.

Metal cover strips (optional) are affixed with non-flammable adhesive over each adjoining pocket, eliminating the possibility of dust bypass between pockets where staples or clinches are traditionally used. The cover strips also provide added structural integrity to prevent filter blowout.

The U-channel header allows the pocket support channels to extend into the full 13/16" depth of the header to sandwich the media between the pocket support channels and the header. An adhesive is applied inside the header where the metals compress and hold the media. This ensures that pockets will stay firmly in place during installation and service.

**Media Area (sq. ft.)**

Face Dimensions w x h	Pocket Length						Number of Pockets
	12"	15"	18"	22"	30"	36"	
12x24	13.0	16.3	19.5	23.8	32.5	39.0	3
	17.3	21.7	26.0	31.8	43.3	52.0	4
20x24	21.7	27.1	32.5	39.7	54.2	65.0	5
	26.0	32.5	39.0	47.7	65.0	78.0	6
20x20	22.0	27.5	33.0	40.3	55.0	66.0	6
24x24	26.0	32.5	39.0	47.7	65.0	78.0	6
20x24	34.7	43.3	52.0	63.6	86.7	104.0	8
	34.7	43.3	52.0	63.6	86.7	104.0	8
24x24	43.3	54.2	65.0	79.4	108.3	130.0	10
	52.0	65.0	78.0	95.3	130.0	156.0	12

**Part Number Guide**

Product Code	Efficiency	Pocket Count	Dimensions	Gasketing	Loops
QP	6,8,9	3,4,5,6 8,10,12	WxHxD	X=Air Exit E=Air Entry	T=Top B=Bottom D=Top & Bottom
<b>Example: QP910242422X = Quality Pak, 95% Efficient, 10 Pkt, 24x24x22, gasket on air exit side of header, no loops.</b>					

**Performance Data -  
Quality Pak (24x24x30 - 8 Pocket Filter)**

Product Code	ASHRAE 52.2 - 1999			Initial Resistance "w.g."	Final Resistance "w.g."	
	MERV Value	E1 %	E2 %	E3 %	@ 295 fpm	@ 295 fpm
QP6	12	53	86	99	0.32	1.00
QP8	13	82	97	99	0.43	1.00
QP9	14	90	95	100	0.49	1.00

Characteristics	Quality Pak Synthetic Bag Filter
<b>Filter Media - Particulate</b>	100% polypropylene lofted microfiber
<b>Assembly Adhesive</b>	Non-flammable adhesive applied to entire header & pocket channels
<b>Support Header &amp; Pocket Support Channels</b>	Galvanized steel support elements staked, riveted and glued into one composite framework for leakproof pocket attachment.
<b>Max. Temperature</b>	150°F, Peaks 200°F (65°C, Peaks 93°C)
<b>Max. Humidity</b>	Resistant to 100% R.H.
<b>Flammability</b>	UL900, Class 2

\*Trade names and company names are used for identification purposes only.