



QUALITY FILTERS, INC.


THINKSIMPLE. THINKSMART. THINKQUALITY.

23351 Grissom Drive
 Robertsdale, AL 36567
 www.QualityFilters.com

Phone: (251) 947-2400
 Order Fax: (251) 947-2499
 Sales Fax: (251) 947-7948

Quality Filters Space Baron Research Products "Space-Gard" Series

Date 22 Dec 09	Dwg No.	Rev
Date 22 Dec 09	Q-110032	B

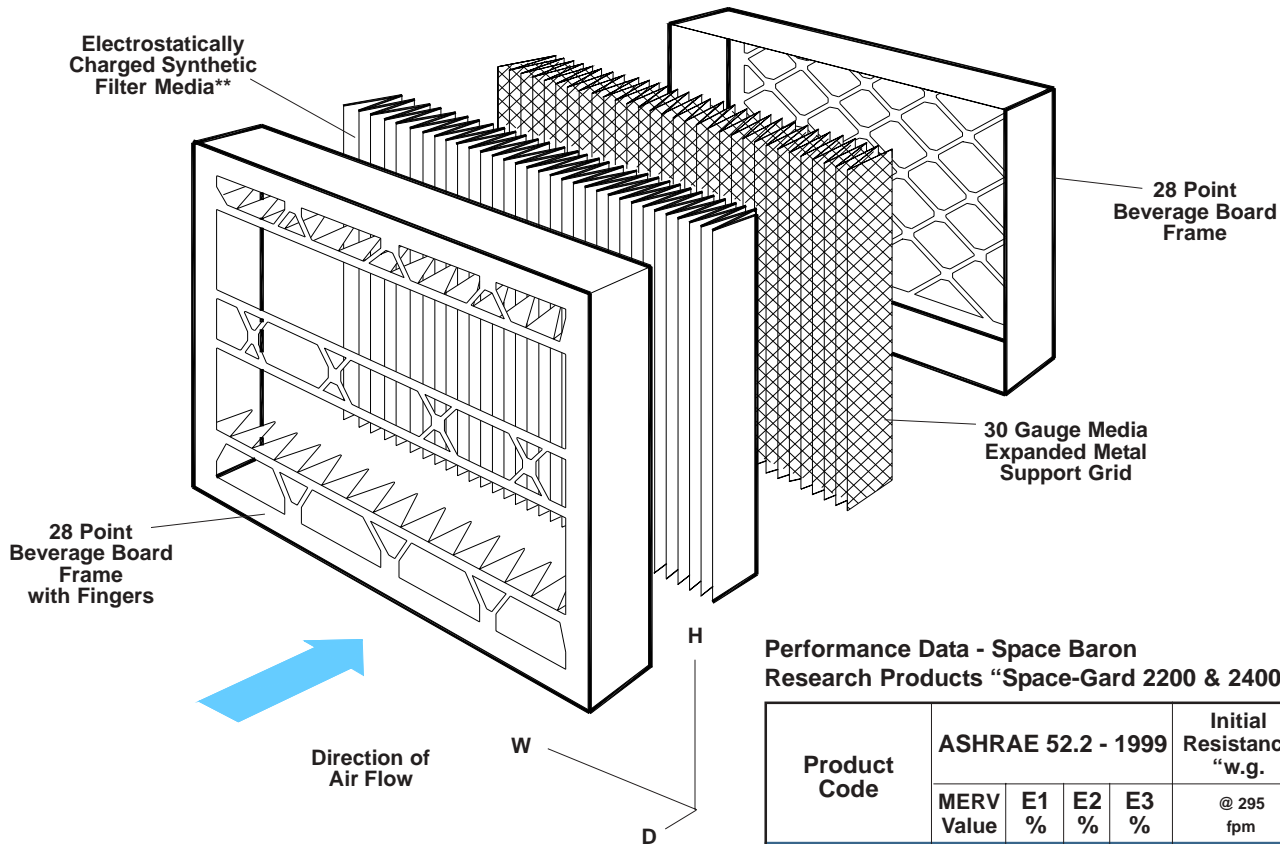

Performance Data - Space Baron Research Products "Space-Gard 2200 & 2400" Series

Product Code	ASHRAE 52.2 - 1999				Initial Resistance	Final Resistance
	MERV Value	E1 %	E2 %	E3 %	@ 295 fpm	@ 295 fpm
SBRP2240	8	n/a	n/a	n/a	0.08	.50
SBRP22MQP	11	n/a	n/a	n/a	0.094	.50
SBRP22GQP	13	n/a	n/a	n/a	0.22	.50
SBRP22OB	8	n/a	n/a	n/a	0.1	.50
SBRP2440	8	n/a	n/a	n/a	0.08	.50
SBRP24MQP	11	n/a	n/a	n/a	0.094	.50
SBRP24GQP	13	n/a	n/a	n/a	0.22	.50
SBRP24OB	8	n/a	n/a	n/a	0.1	.50

Notes:

Space Baron Research Products "Space-Gard 2200" & "Space-Gard 2400" Residential Air Cleaner replacement filters are 5" deep pleated Quality Pleats that are specifically designed to replace other comparably sized ducted air products. Space Baron Research Products "Space-Gard 2200 & 2400" are available in 3 efficiencies including: MERV 8, MERV 11, MERV 13 and Carbon medias.

Part Number Guide

Product Code	Description	Nominal Dimensions	Actual Frame Dimensions
SBRP2240	Type 40 - MERV 8	20" x 25" x 6"	19.75" x 24.25" x 6"
SBRP2440	Type 40 - MERV 8	16" X 27" x 6"	15.4375" x 26.9375" x 6"
SBRP22MQP	MQP - MERV 11	20" x 25" x 6"	19.75" x 24.25" x 6"
SBRP24MQP	MQP - MERV 11	16" X 27" x 6"	15.4375" x 26.9375" x 6"
SBRP22GQP	GQP - MERV 13	20" x 25" x 6"	19.75" x 24.25" x 6"
SBRP24GQP	GQP - MERV 13	16" X 27" x 6"	15.4375" x 26.9375" x 6"
SBRP22OB	Odor Ban - MERV 8	20" x 25" x 6"	19.75" x 24.25" x 6"
SBRP24OB	Odor Ban - MERV 8	16" X 27" x 6"	15.4375" x 26.9375" x 6"

*Trade names and company names are used for identification purposes only.

Characteristics	Space Baron Research Products "Space-Gard" Series
Filter Media - Particulate	100% synthetic gradient media, electrostatically charged
Filter Media - Odor Ban	Fine carbon powder bonded to lofted polyester media
Filter Support Grid	30 gauge galvanized expanded metal grid
Frame	Moisture resistant 28 point beverage board
Gasketing	Closed cell urethane foam
Assembly Technique	Media pack totally bonded to frame
Max. Temperature	180°F (82°C) continuous service, Peaks 225°F (107°C)
Max. Humidity	Resistant to 100% R.H.